



# ELEVAH® 65 MOVE picking

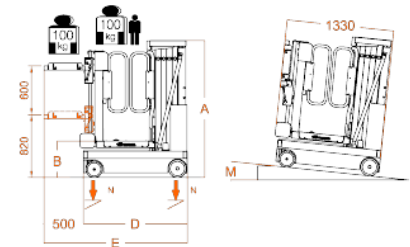

# ELEVAH® 65 MOVE picking

Max. working height		6,50 m
Max capacity		200 kg
Number of people		1
Use		Internal - External
<b>A</b>	Closed machine height	1720 mm
<b>B</b>	Minimum platform height	460 mm
<b>C</b>	Maximum platform height	4700 mm
<b>D</b>	Base overall dimensions	1280 mm
<b>E</b>		1780 mm
<b>F</b>		780 mm
<b>G</b>	Cage dimensions	640 mm
<b>H</b>		710 mm
Machine weight		830 kg
<b>K</b>	Fixed picking tray dimensions	440 mm
<b>L</b>		740 mm
Fixed picking tray capacity		20 kg
Drive wheels dimension		Ø 220 x 65 mm
Swivel wheels dimensions		Ø 200 x 50 mm



## PICKING PLATFORM

Adjustment		Electrical
Stroke		600 mm
Min. height from the ground		820 mm
Maximum height from the ground		5650 mm
<b>I</b>	Dimensions	500 mm
<b>J</b>		680 mm
Capacity		100 kg

## PERFORMANCE

Power supply		24 V
Batteries		Lead-Acid Batteries 12V 105 Ah
Battery charger		110V - 220V
<b>M</b>	Maximum climbing ability	15%
Climbing ability at height		2,5%
Internal turning radius		0
External turning radius		1095 mm
Max. speed (rising – descending)		0,2 m/s
Maximum speed (with basket on the ground)		5 km/h
<b>N</b>	Maximum pressure for wheel at full load*	3,6 kN
Work cycles (with fresh batteries) **		Ca. 130

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

**CE** Complies with European regulations for man-up forklift trucks. UNI EN ISO 3691-1.

